

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
Please do not report the images to the
Image Problem Mailbox.

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 899 937 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.03.1999 Bulletin 1999/09

(51) Int Cl.⁶ **H04N 1/00**

(21) Application number: **98306695.2**

(22) Date of filing: **21.08.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Lin, Qian**
Santa Clara, CA 95051 (US)

(74) Representative: **Jehan, Robert et al**
Williams, Powell & Associates,
4 St Paul's Churchyard
London EC4M 8AY (GB)

(30) Priority: **25.08.1997 US 921891**

(71) Applicant: **Hewlett-Packard Company**
Palo Alto, California 94304 (US)

(54) **Halftoning processing**

(57) A process and apparatus improve color half-tone imaging for ink-based printing by reducing the amount of time necessary to perform the halftoning process (270), by reducing the amount of ink consumed and by increasing the quality of the images (280) produced. These benefits are achieved by adapting Image Resolution Enhancement Technology (IRET) to render color images that achieve near-photographic image quality on a color inkjet printer having multiple dye load and increased scan axis addressability, while keeping the computation complexity to a minimum. This is achieved by designing basic patterns at multiple intensities, and by using a multi-level halftoning technique to obtain smooth gradations. For plain paper, as well as for coated paper, multi-level halftoning is performed on an asymmetric geometry to yield the best result, while for glossy paper, a regular geometry yields the best result because of the limited ink absorption capacity for glossy paper. Further benefits are achieved through non-primary color ink reduction and the use of asymmetric dither matrices. Thus, the method and apparatus of the present invention will yield images that have few undesirable artifacts such as banding, texturing and "worms". Furthermore, a reduced amount of processing time will be required to render an image and a modest amount of ink will be used. Besides decreasing the cost of printing, the use of a lower amount of ink can cause decreased dry time for each print, and can reduce curling of the paper, and smudging of the image.

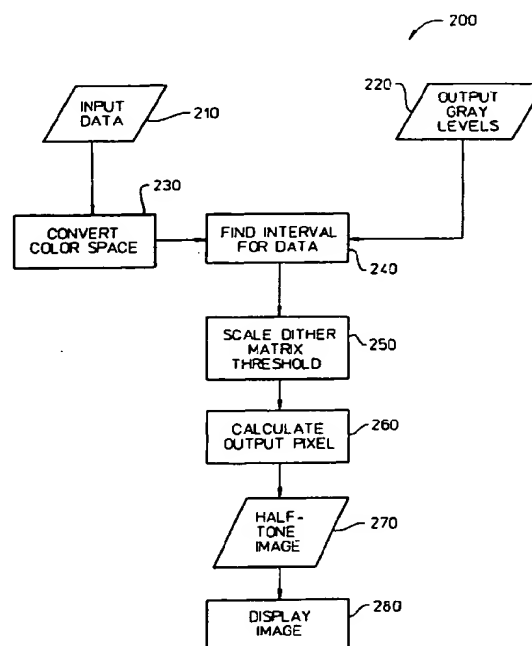


Figure 2

EP 0 899 937 A2

Description

[0001] The present invention relates to halftoning of a color continuous tone image, for example, to processing color continuous-tone images into halftone images for ink-based printing.

5 [0002] A color inkjet printer has the capability to render an image with color dots that are either bi-level or multi-level in intensity. Color dots of various intensities can be generated by using multiple chambers in print heads, each loading color inks with a different dye load. One example of such a printing system employs regular dye-load cyan, magenta, yellow, and black inks, and reduced dye-load cyan and magenta inks.

10 [0003] A printer can also achieve a higher scan axis printing resolution by increasing the firing frequency relative to the cartridge speed. Because the printer dot size remains the same, this is often referred to as the printer addressability. For example, a 300 dpi (dot per inch) printer can have the addressability of 600 x 300 dpi.

15 [0004] Image Resolution Enhancement Technology (IRET) includes two components: a multi-level halftoning algorithm, and basic pattern design. The multi-level halftoning algorithm is a general halftoning method, while the basic pattern design is more device specific. IRET has been successfully implemented in the Hewlett-Packard Color LaserJet laser printer. See, Q. Lin, Methods to Print N-Tone Images with Multi-leveling Techniques, U.S. patent application 08/205,672, filed March 2, 1994, HP Docket 1093765-1; Q. Lin, Printing N-Tone Images with Imperceptible Dots, U.S. patent number 5,615,021, issued March 21, 1997, HP Docket 1094347-1; Q. Lin, B. Hoffmann, and J. Trask, Resolution Enhancement Procedure and Apparatus for a Color Laser Printer, U.S. patent application 08/788,767, filed January 24, 1997, HP Docket 10960458-1.

20 [0005] It is desirable to develop a halftoning method for rendering a color image that achieves near-photographic image quality on a color inkjet printer having multiple dye loads and increased scan axis addressability. However, as will be discussed below in greater detail, one cannot readily extend the IRET to a dual-dye load inkjet printer. A standard application of IRET to a dual-dye load inkjet printer will yield images that have undesirable artifacts such as banding, texturing and "worms". Furthermore, a large amount of processing time will be required to render an image and an
25 inordinate amount of ink will be used. Besides increasing the cost of printing, the use of excessive ink can cause additional undesirable effects such as an increased dry time for each print, curling of the paper, and smudging of the image.

[0006] Thus, it can be seen that physical properties of ink-based printing impose cost, output speed, and image fidelity limits upon ink-based color halftone image output devices, and hinder the use of these devices in many appli-
30 cations.

[0007] Therefore, there is an unresolved need for a technique that can improve color halftone imaging for ink-based printing by reducing the amount of time necessary to perform the halftoning process, by reducing the amount of ink consumed and by increasing the quality of the images produced.

[0008] The present invention seeks to provide improved halftoning of an image.

35 [0009] According to an aspect of the present invention there is provided a process of halftoning a color continuous tone image as specified in claim 1.

[0010] According to another aspect of the present invention there is provided a processor for halftoning a color continuous tone image as specified in claim 9.

40 [0011] A preferred process and apparatus are described below to improve color halftone imaging for ink-based printing by reducing the amount of time necessary to perform the halftoning process, by reducing the amount of ink consumed and by increasing the quality of the images produced. These benefits are achieved by adapting Image Resolution Enhancement Technology (IRET) to render color images that achieve near-photographic image quality on a color inkjet printer having multiple dye load and increased scan axis addressability.

45 [0012] We describe a method for rendering a color image on a dual dye-load inkjet printer with a near-photographic quality, while keeping the computation complexity to a minimum. This is achieved by designing basic patterns at multiple intensities, and by using a multi-level halftoning technique to obtain smooth gradations. For plain paper, as well as for coated paper, multi-level halftoning is performed on an asymmetric geometry to yield the best result, while for glossy paper, a regular geometry yields the best result because of the limited ink absorption capacity for glossy paper. Further benefits are achieved through non-primary color ink reduction and the use of asymmetric dither matrices.

50 [0013] Thus, the preferred method and apparatus will yield images that have few undesirable artifacts such as banding, texturing and "worms". Furthermore, a reduced amount of processing time will be required to render an image and a modest amount of ink will be used. Besides decreasing the cost of printing, the use of a lower amount of ink can cause decreased dry time for each print, and can reduce curling of the paper, and smudging of the image.

55 [0014] An embodiment of the present invention is described below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a drawing illustrating the Multi-level Halftoning Principle;

Figure 2 is a drawing illustrating an Image Resolution Enhancement Technology color halftoning technique modified

to accommodate the special needs of a color inkjet printer having multiple dye load and increased scan axis addressability; and

Figure 3 is a drawing illustrating representation of the lightness values for the basic pattern of dual-dye load cyan ink.

[0015] Embodiments of the invention are discussed below with reference to Figures 1-3. Those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes, however, because the invention extends beyond these limited embodiments.

[0016] The following describes a halftoning method and apparatus for rendering a color image that achieves near-photographic image quality on a color inkjet printer having multiple dye load and increased scan axis addressability.

Image Resolution Enhancement Technology

[0017] Image Resolution Enhancement Technology (IRET) includes two components: a multi-level halftoning algorithm, and basic pattern design. The multi-level halftoning algorithm is a general halftoning method, while the basic pattern design is more device specific. As mentioned previously, IRET has been successfully implemented in the Hewlett-Packard Color LaserJet laser printer. The preferred embodiment extends IRET to a dual-dye load inkjet printer. For continuity, we will review the multi-level halftoning algorithm in IRET, and then describe how to apply it to the dual dye-load inkjet printer that has increased scan axis addressability.

[0018] The multi-level halftone algorithm was developed to halftone any set of input numbers to any smaller set of output numbers. When there are several intensity levels to halftone into, it is possible to create a gray scale impression with dots at different intensity levels. This gives one more degree of freedom: not only can one select the arrangement of dots, but also which two dot intensities to use. It is preferable to select printer dots at two output gray levels closest to the input to perform spatial modulation. This will result in lowest pattern texture.

[0019] To illustrate this with an example, Figure 1 is a drawing illustrating the Multi-level Halftoning Principle. Suppose we have 4 output levels with gray levels of 0, 80, 130, and 255, as shown in Figure 1. Then any input data in the range of 0 to 80 belongs to interval 1, and will be halftoned using output levels 0 and 1. Similarly, any input data in the range of 81 to 130 belongs to interval 2, and will be halftoned using output levels 1 and 2. Finally, any input data in the range of 131 to 255 belongs to interval 3, and will be halftoned using output levels 2 and 3. For a gray patch with input gray level x that belongs in interval k , exactly how many pixels will take output level k and $k + 1$ respectively, and how they will be distributed spatially, depends on the dither matrix employed.

[0020] To generate visually pleasing patterns, because the printing dots are typically large enough to be perceived as dots, the printing dots should be maximally dispersed when rendering a continuous tone image. Dispersing them will create a dot arrangement with the least perceptually detectable structure. One method of generating a halftone image with maximally dispersed dots is described in a US patent. See, Q. Lin, Halftone Images Using Special Filters, US Patent 5,317,418, issued May 31, 1994, HP docket 1093443-1. For a color printer, it is further desirable for color dots to be maximally dispersed and to be dispersed with the least perceptually detectable changes in both hue and intensity. One method for generating such a halftone image is described in a US patent application. See, Q. Lin and J.P. Allebach, Joint Design of Dither Matrices for a Set of Colorants, U.S. patent application 08/641304, filed April 30, 1996.

[0021] Similar reasoning also applies to a multi-level printer. Hence, it is desirable to use a set of matrices jointly designed for primary colors in conjunction with the multi-level halftoning algorithm.

[0022] In general, suppose there are K output levels 1, 2, ..., K corresponding to non-uniformly spaced gray levels N_1, N_2, \dots, N_K , with $N_1 < N_2 < \dots < N_K$, and the input gray scale range is from N_1 to N_K . Then according to this scheme, any input gray patch with gray level between N_K and N_{K+1} will be rendered using printer dots at intensity levels N_K and N_{K+1} .

[0023] To render input $x(m, n)$ at pixel position (m, n) , the corresponding element $t(m, n)$ in a halftone matrix is scaled to the region $[N_K, N_{K+1}]$, and compared with $x(m, n)$. Let $t'_k(m, n)$ be the scaled-down matrix:

$$t'_k(m, n) = t_k(m, n) \times \frac{N_{K+1} - N_K}{N_K - N_1},$$

then the output $y(m, n)$ at pixel position (m, n) is

$$y(m, n) = \begin{cases} k + 1 & \text{if } t'_k(m, n) + N_K < x < N_{K+1} \\ k & \text{if } N_K < x \leq t'_k(m, n) + N_K \end{cases}$$

[0024] Figure 2 is a drawing illustrating an Image Resolution Enhancement Technology color halftoning technique 200 modified according to the preferred embodiment to accommodate the special needs of a color inkjet printer that has multiple dye loads and increased scan axis addressability.

[0025] To perform multi-level halftoning using the basic algorithm, we can first compare the input data (210) with the output gray levels (220) to determine (240) the interval into which the data falls, and then store it in a look-up table lut_1 . This would require 256 bytes. We can also store the result of scaling a dither matrix threshold (250) for each interval in a second look-up table lut_2 . This would require 256K bytes, where K is the total number of output levels. In addition, one can also store the $M \times M$ dither matrix, which requires $M \times M$ bytes.

[0026] For example, if we have 16 output levels, and we use a 16 X 16 dither matrix, then the total amount of ROM needed is 4.6k bytes.

[0027] Let $x(m, n)$ be the input pixel, and $t(m, n)$ be the dither matrix threshold at the current pixel (m, n) , then the output pixel $y(m, n)$ is obtained (260) using

$$k = lut_1[x(m, n)]$$

$$y(m, n) = \begin{cases} k + 1 & \text{if } x(m, n) > lut_2[k][t(m, n)] \\ k & \text{else} \end{cases}$$

The computation required per pixel is then 2 table look-ups, 1 comparison, and 0 to 1 addition. The resulting halftone image (270) can then be printed or displayed (280).

Applying IRET to Dual Dye-Load Inkjet Printer

[0028] Halftoning for a dual dye-load printer can be achieved by converting the problem into a multi-level halftoning problem. Because the dual dye-load printing system has four primary colors, cyan, magenta, yellow and black, one preferably first converts (230) RGB to CMYK. The cyan and magenta color can then be rendered using the regular dye-load ink and the reduced dye-load ink, depending on the cyan and magenta levels, respectively. For example, light tone regions will be rendered using the low dye-load ink, while midtone regions will be rendered with a mixture of reduced dye-load ink and regular dye-load ink, with the amount of regular dye-load ink increasing toward the dark tone regions. Moreover, we have complete control over the placement of the dots to minimize overlap, thus reducing halftone texture. For example, after we achieve 100% coverage of the low dye-load ink, we gradually replace low dye-load dots with regular dye-load dots, while maintaining 100% ink coverage.

[0029] Utilizing the increased scan axis addressability in conjunction with the dual dye-load inks, it is possible to achieve near photographic image quality on a low cost inkjet printer. Two embodiments, will be discussed next.

First embodiment: using 300x600 geometry to obtain more levels

[0030] We can use the increased scan axis resolution to obtain more levels. Using the 300x600 dpi mode, it is possible to get a maximum of 8 basic output levels for cyan and magenta, not including white, on the 300x300 dpi grid. These are 1L, 2L, 1D, 1D1L, 1D2L, 2D, 2D1L, 2D2L, where 1D stands for one dark drop, 1L stands for 1 light drop, and so on. Figure 3 is a representation of the lightness (L^*) values for the basic patterns of cyan ink according to an embodiment of the present invention. However, as shown in Figure 3, which plots the L^* for the basic output levels of cyan, 2D1L, 2D2L are actually lighter than 2D on both the plain paper and the coated paper. Levels 1D and 1D1L have similar darkness as 1D2L, but much worse banding. So, for one embodiment only 4 levels were selected for cyan and magenta: 1L, 2L, 1D2L, and 2D.

[0031] The halftoning strategies mentioned above that worked very well on plain paper and coated paper resulted in too much ink on glossy paper. After some experimentation, we found that using only 1 light drop (1L) or 1 dark drop (1D) for cyan and magenta (tri-level), and 1 drop of yellow (bi-level) on the 300x300 dpi grid gives good results.

[0032] It is important to realize that by selecting the appropriate basic patterns, it is possible to achieve ink limiting, so that ink can be absorbed by the paper without problems. To have more flexible and accurate control, we can, in addition, perform a color decomposition, and calculate the amount of primary colors, secondary colors, and tertiary colors, and limit the maximum amount of each color to the appropriate amount. As an example, secondary colors, such as blue, may need more reduction.

[0033] For example, suppose the red, green, and blue components of a pixel are 30, 50, 40. Then the cyan, magenta, and yellow amounts will be $255 - 30 = 225$, $255 - 50 = 205$, and $255 - 40 = 215$, respectively. The amount of tertiary color is $\min(225, 205, 215) = 205$. The amount of secondary color (green) is $\max(225, 205, 215) - \min(225, 205, 215) = 225 - 205 = 20$. The amount of primary color (magenta) is $\max(225, 205, 215) - \min(225, 205, 215) = 225 - 205 = 20$. We can reduce each of the tertiary, secondary and primary colors by a different percentage. For example, we can reduce the amount of tertiary color by 20% to $205 \times 0.8 = 164$, we can reduce the amount of secondary color (green) by 10% to $20 \times 0.9 = 18$, and make no adjustment to the primary color cyan. After these ink limiting computations the final cyan amount is $164 + 18 + 20 = 202$, the final magenta amount is 164, and the final yellow amount is $164 + 18 = 182$.

Second Embodiment: asymmetric halftoning on 300x600 geometry

[0034] In the first embodiment, halftoning was performed on the 300x300 dpi grid. The 300x600 dpi mode is used, but dots are combined to form more levels on the 300x300 dpi grid. This is similar to the IRET approach for the Color LaserJet laser printer. See, Q. Lin, B. Hoffmann, and J. Trask, U.S. patent application 08/788,767, filed January 24, 1997, HP Docket 10960458. Alternatively, halftoning can be performed on the 300x600 dpi grid, resulting in tri-level halftoning on cyan and magenta (white, 1 light drop, 1 dark drop), and bi-level halftoning on yellow and black.

[0035] There are two advantages associated with using asymmetric halftoning. First, there is less banding. Super-pixeling is more susceptible to banding in some regions, for example, in the lighter neutral tone region. Secondly, the texture in asymmetric halftoning is more consistent. For example, there is no change in texture in the transition area between 1 light drop and 2 light drops in the cyan and magenta ramps.

[0036] When performing asymmetric halftoning on the 300x600 dpi grid, a dither matrix designed for regular printing geometry will be compressed in one direction, resulting in "worm" like patterns in the highlight region. The effect is subtle but noticeable. This problem can be solved by designing a set of dither matrices for the 300x600 dpi geometry. For stochastic dither matrices such as those described in Lin and Allebach, U.S. patent application 08/641304, filed April 30, 1996, supra, and in Q.

[0037] Lin, US Patent 5,317,418, issued May 31, 1994, supra, the widths of the filters in the matrix design are adjusted to compensate for the space compression in the paper advance direction. For example, the filter width in the scan direction, where the addressability is higher (600 dpi), can be set as twice the filter width in the paper advance direction.

[0038] Observe that on a ramp from white to full magenta, the density of low dye-load magenta dots gradually increases, until 100% coverage is attained. Then the low dye-load dots are gradually replaced by the high dye-load dots while the ink coverage remains at 100%. This ensures that the visibility of halftone texture is minimal, and coalescence of ink drops is also minimal.

[0039] In asymmetric halftoning, the source image is kept at 300x300 dpi while the output bitmap is 600x300 dpi. Let $x(m, n)$ be the input pixel, and $t(m, n)$ be the dither matrix threshold at the current pixel (m, n) , then the output pixel $y(m, n)$ is obtained using

$$k = \text{lut}_1[x(m, n)]$$

$$y(2m, n) = \begin{cases} k + 1 & \text{if } x(m, n) > \text{lut}_2[k][t(2m, n)] \\ k & \text{else} \end{cases}$$

$$y(2m + 1, n) = \begin{cases} k + 1 & \text{if } x(m, n) > \text{lut}_2[k][t(2m + 1, n)] \\ k & \text{else} \end{cases}$$

[0040] Note that it is also possible to scale the source image to 300x600 dpi resolution. However, because the dot size is still at 300 dpi, the extra computation may not be warranted.


Conclusions

[0041] We described a method for rendering a color image on a dual dye-load inkjet printer with a near-photographic quality, while keeping the computation complexity to a minimum. This is achieved by designing basic patterns at multiple intensities, and by using a multi-level halftoning technique to obtain smooth gradations. For plain paper, as well as for coated paper, multi-level halftoning is performed on an asymmetric geometry to yield the best result, while for glossy paper, a regular geometry yields the best result because of the limited ink absorption capacity for glossy paper.

[0042] The disclosures in United States patent application no. 08/921,891, from which this application claims priority, and in the abstract accompanying this application are incorporated herein by reference.


Claims

1. A process of halftoning a color continuous tone image to form a halftone image, the process comprising the steps of:
 - for at least one color, extracting the color information for the selected color from the color continuous tone image; and
 - performing a multi-level halftoning for the selected color wherein the multiple levels are chosen such that when printing a tone ramp for the selected color, light tone regions are rendered using a low dye-load ink, while midtone regions are rendered with a mixture of the low dye-load ink and a regular dye-load ink, with the regular dye-load ink amount increasing toward dark tone regions.
2. The process as set forth in 1, wherein the multiple levels are chosen such that when printing the toner ramp for the selected color, after substantially full coverage of the low dye-load ink is achieved, low dye-load dots are gradually replaced with regular dye-load dots, while maintaining the substantially full coverage.
3. The process as set forth in 1 or 2, wherein the multiple levels are chosen based upon characteristics of a target print medium.
4. The process as set forth in 1, 2 or 3, comprising the steps of:
 - performing a color decomposition into primary and non-primary colors; and
 - limiting the maximum amount of primary and non-primary color to achieve ink limiting.
5. The process as set forth in 1 to 4, wherein the multi-level halftoning is performed on an asymmetric geometry.
6. The process as set forth in 1 to 4, wherein the multi-level halftoning is performed on a symmetric geometry.
7. The process as set forth in 1 to 4, wherein the multi-level halftoning is performed using an asymmetric dither matrix.
8. The process as set forth in 1 to 4, wherein the multi-level halftoning is performed using a symmetric dither matrix.
9. A processor for halftoning a color continuous tone image to form a halftone image according to any of the processes set forth in 1 to 8, the processor comprising:
 - for at least one color, means for extracting the color information for the selected color from the color continuous tone image; and
 - means for performing a multi-level halftoning for the selected color wherein the multiple levels are chosen such that when printing a tone ramp for the selected color, light tone regions are rendered using a low dye-load ink, while midtone regions are rendered with a mixture of the low dye-load ink and a regular dye-load ink, with the regular dye-load ink amount increasing toward dark tone regions.
10. The processor as set forth in 9, comprising:
 - means for performing a color decomposition into primary and non-primary colors; and
 - means for limiting the maximum amount of primary and non-primary colors to achieve ink limiting.

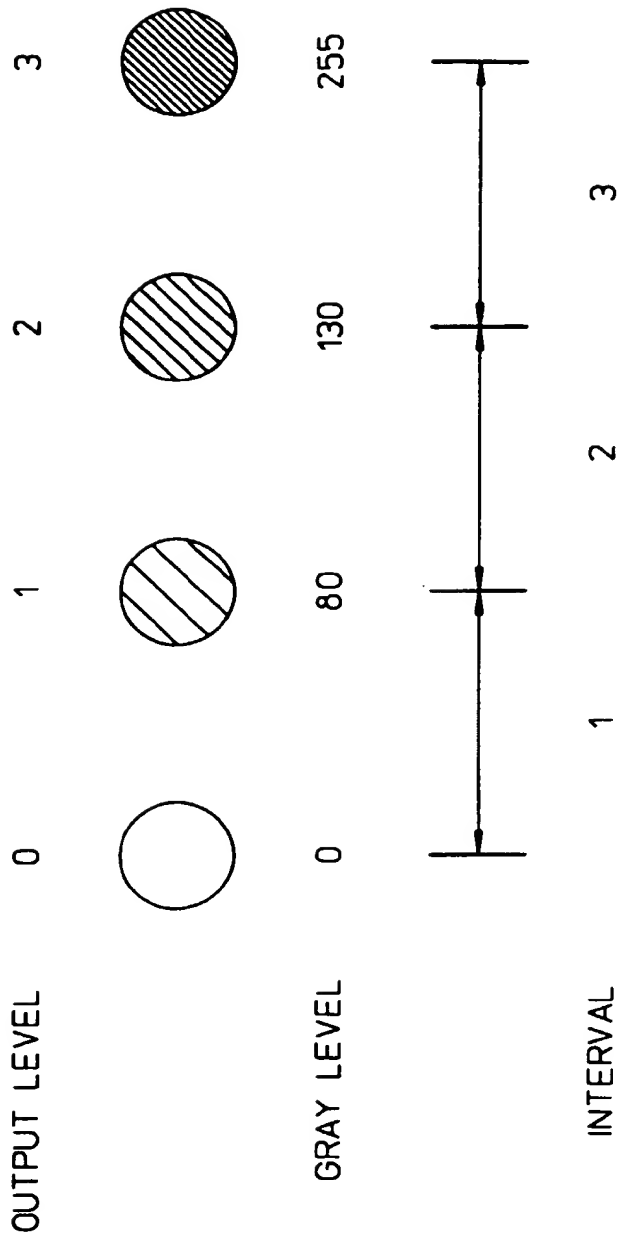

MULTI-LEVEL HALFTONING PRINCIPLE.

Figure 1

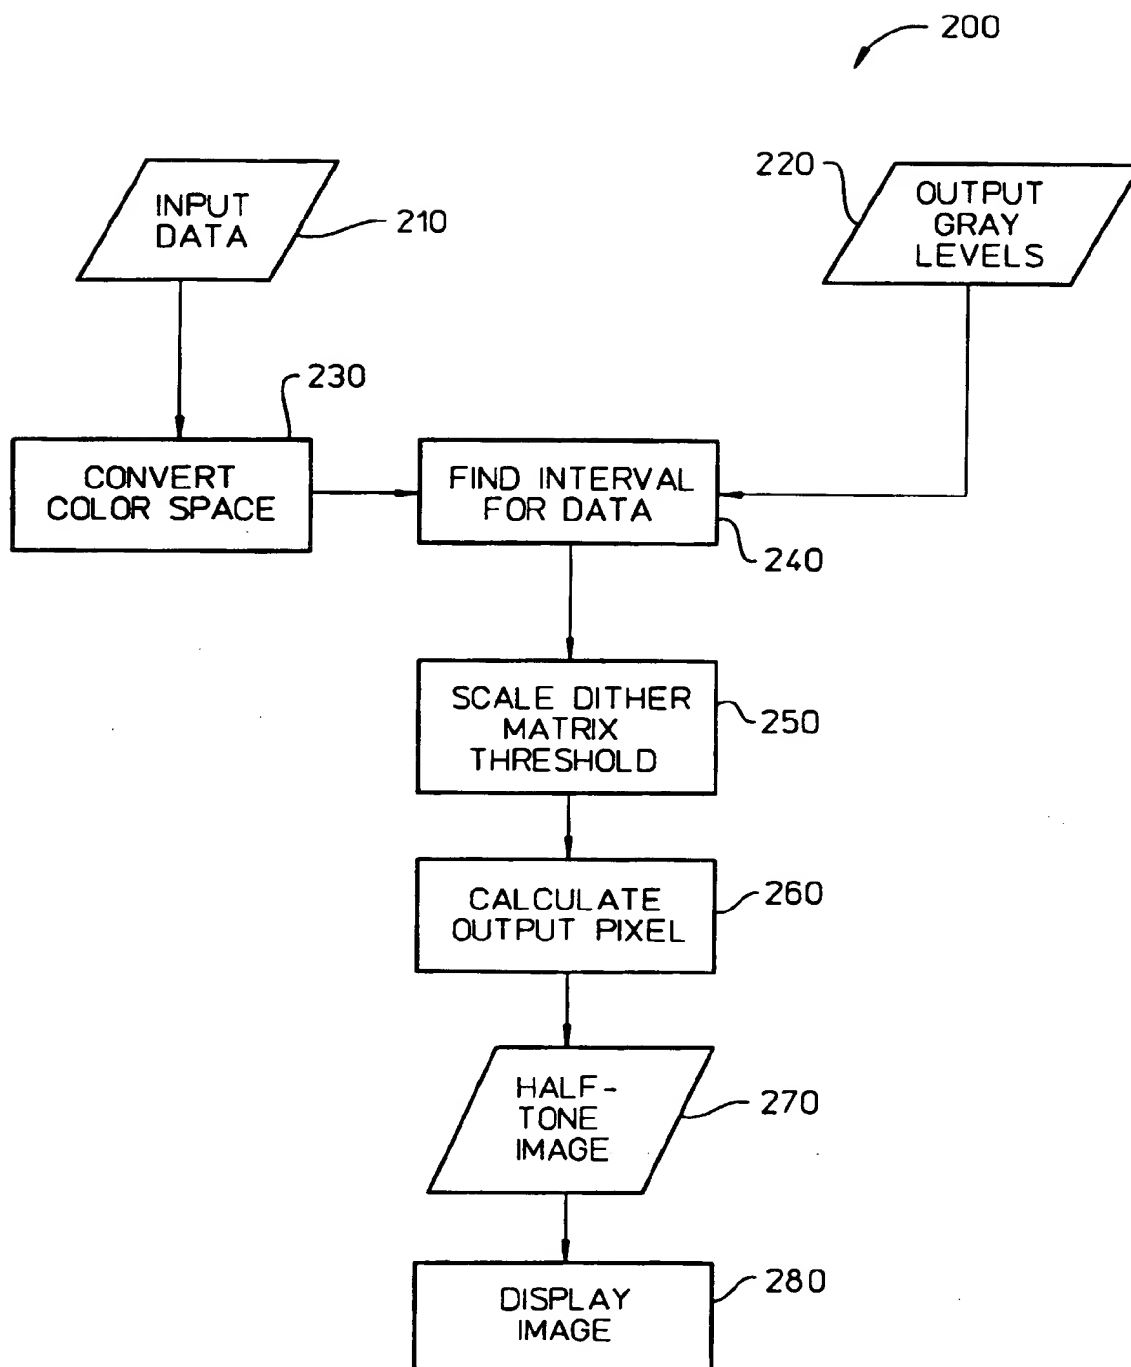**Figure 2**


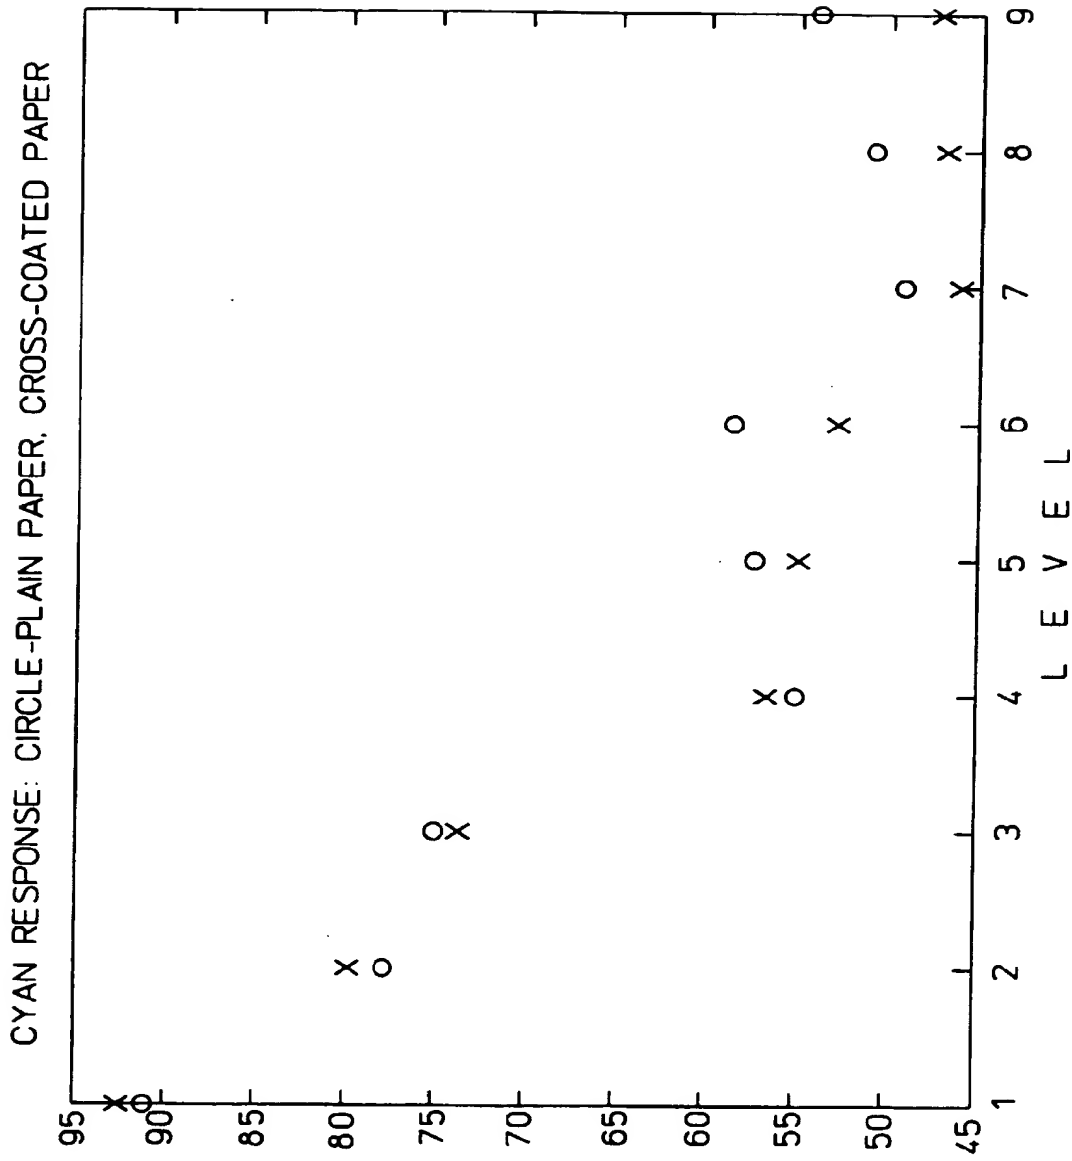


Figure 3

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 899 937 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
24.11.1999 Bulletin 1999/47

(51) Int Cl.⁶: **H04N 1/00**

(43) Date of publication A2:
03.03.1999 Bulletin 1999/09

(21) Application number: **98306695.2**

(22) Date of filing: **21.08.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Lin, Qian**
Santa Clara, CA 95051 (US)

(74) Representative: **Jehan, Robert et al**
Williams, Powell & Associates,
4 St Paul's Churchyard
London EC4M 8AY (GB)

(30) Priority: **25.08.1997 US 921891**

(71) Applicant: **Hewlett-Packard Company**
Palo Alto, California 94304 (US)

(54) **Halftoning processing**

(57) A process and apparatus improve color half-tone imaging for ink-based printing by reducing the amount of time necessary to perform the halftoning process (270), by reducing the amount of ink consumed and by increasing the quality of the images (280) produced. These benefits are achieved by adapting Image Resolution Enhancement Technology (IRET) to render color images that achieve near-photographic image quality on a color inkjet printer having multiple dye load and increased scan axis addressability, while keeping the computation complexity to a minimum. This is achieved by designing basic patterns at multiple intensities, and by using a multi-level halftoning technique to obtain smooth gradations. For plain paper, as well as for coated paper, multi-level halftoning is performed on an asymmetric geometry to yield the best result, while for glossy paper, a regular geometry yields the best result because of the limited ink absorption capacity for glossy paper. Further benefits are achieved through non-primary color ink reduction and the use of asymmetric dither matrices. Thus, the method and apparatus of the present invention will yield images that have few undesirable artifacts such as banding, texturing and "worms". Furthermore, a reduced amount of processing time will be required to render an image and a modest amount of ink will be used. Besides decreasing the cost of printing, the use of a lower amount of ink can cause decreased dry time for each print, and can reduce curling of the paper, and smudging of the image.

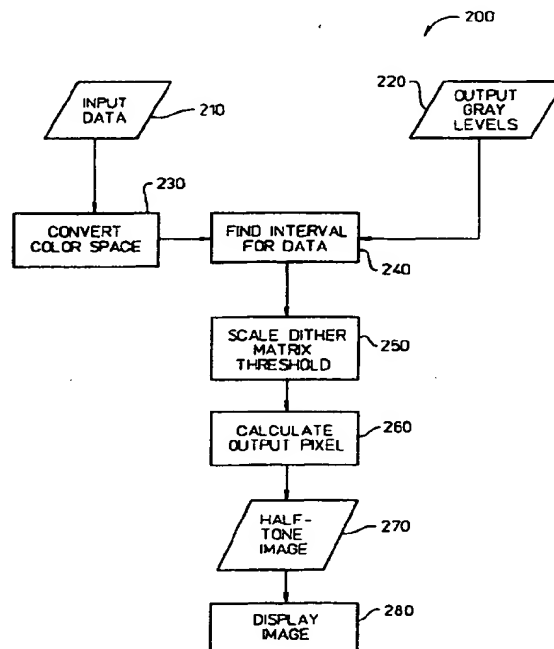


Figure 2

EP 0 899 937 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 6695

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	1985 SID International Symposium, Digest of Technical Papers, Society for Information Display, May 1985 pages 329 - 331 M. TAKAHASHI et al.: "Full-Color Ink-Jet Printer Using Multilevel Ink" XP002090140 * page 329, right-hand column, line 1 - page 330, left-hand column, line 9 *	1,2,6,9	H04N1/00
Y	---	4,5,7,8, 10	
Y	US 4 595 948 A (TADASHI ITOH ET AL.) 17 June 1986 * column 3, line 6 - column 6, line 39 *	4,10	
Y	---		
Y	EP 0 695 080 A (CANON K. K.) 31 January 1996 * claims 1,3 *	4,10	
A	---		
A	US 4 672 432 A (NOBUAKI SAKURADA ET AL.) 9 June 1987 * column 1, line 36 - column 3, line 34 * * column 4, line 13 - line 17 *	3	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04N
Y	---		
Y	M. DOERING ET AL.: "Hardcopy Reproduction of Color Videotex Images by Means of Trilevel Dot Space Modulation and Ink Jet Printing" JOURNAL OF IMAGING TECHNOLOGY, vol. 14, no. 3, June 1988, pages 73-78, XP000006244 Springfield, VA (US) * page 74, left-hand column, last paragraph - page 75, left-hand column, paragraph 2 *	5,7	

	-/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18 January 1999	Examiner De Roeck, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1533 (03.02.1994)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 6695

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
Y	WIN NAING ET AL.: "An Evaluation of Image Quality for Tri-Level Images Obtained by a New Algorithm" JOURNAL OF IMAGING TECHNOLOGY, vol. 15, no. 1, February 1989, pages 23-28, XP000050813 Springfield, VA (US) * page 23, left-hand column, line 1 - page 25, line 4 *	7,8	
A	W. LAMA ET AL.: "Hybrid (Gray Pixel) Halftone Printing" JOURNAL OF IMAGING TECHNOLOGY, vol. 15, no. 3, June 1989, pages 130-135, XP000038805 Springfield, VA (US)		
A	EP 0 622 951 A (HEWLETT-PACKARD COMPANY) 2 November 1994		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 18 January 1999	Examiner De Roeck, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1501 (3.12.97) (P/M/201)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 6695

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-01-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4595948	A	17-06-1986	JP 59068245	A	18-04-1984
EP 695080	A	31-01-1996	JP 8098048	A	12-04-1996
US 4672432	A	09-06-1987	JP 60154073	A	13-08-1985
			JP 59201863	A	15-11-1984
			DE 3415778	A	31-10-1984
			DE 3448326	C	02-11-1995
EP 622951	A	02-11-1994	US 5485180	A	16-01-1996
			JP 7068918	A	14-03-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82